

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problems Mailbox.**



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : H04Q 7/38, 7/24, H04L 1/18</p>	<p>A1</p>	<p>(11) International Publication Number: WO 96/33586</p> <p>(43) International Publication Date: 24 October 1996 (24.10.96)</p>
<p>(21) International Application Number: PCT/SE96/00467</p> <p>(22) International Filing Date: 10 April 1996 (10.04.96)</p> <p>(30) Priority Data: 08/422,790 17 April 1995 (17.04.95) US</p> <p>(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE).</p> <p>(72) Inventor: TURINA, Dalibor, Reduttvägen 14 D, S-183 67 Täby (SE).</p> <p>(74) Agents: BOHLIN, Björn et al.; Telefonaktiebolaget LM Ericsson (publ), Patent and Trademark Dept., S-126 25 Stockholm (SE).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p>
		<p>Published</p> <p><i>With international search report.</i></p> <p><i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>

(54) Title: TEMPORARY FRAME IDENTIFICATION FOR ARQ IN A RESERVATION-SLOTTED-ALOHA TYPE OF PROTOCOL

(57) Abstract

Automatic repeat request (ARQ) functionality in a cellular mobile packet data communication system using a reservation slotted-ALOHA protocol is provided by assigning a temporary frame identity (TFI) to each data frame transmitted to or from a mobile station. The assigned TFI is unique among concurrent frame transfer sequences in a cell, and may be assigned based on information in a data frame sent to the mobile station or based on information in a channel reservation message that precedes the data frame sent to the mobile station. The TFI may also be assigned based on information in a channel reservation message that precedes a data frame sent from the mobile station, and the TFI assigned is unique among concurrent frame transfer sequences in a cell. The TFI is included in every block belonging to a particular frame, a block being the unit of data on which ARQ is based. A partial data frame to be retransmitted in case of a transmission error contains only the blocks determined by the ARQ protocol type (e.g., selective or Go-back-N) used, whereby a primary block need not be added to identify the mobile station. Blocks belonging to frames destined for different mobile stations can be multiplexed on the downlink based on the TFI. The mobile station may include, in its random access request, an indication that a TFI is already assigned.

1	2	3	4	5	6	7	8	OCTET
MS IDENTITY								1
								2
								3
								4
FRAME LENGTH								5
FRAME TYPE				N/S		SEQ NUM		6

1	2	3	4	5	6	7	8	OCTET
TFI								1
BLOCK SEQ NUM					TYPE		P/F	2
NUM OF TRIES				FOR FURTHER USE				3

1	2	3	4	5	6	7	8	OCTET
TF1								1
BLOCK SEQ NUM					TYPE		P/F	2

1	2	3	4	5	6	7	8	OCTET
RANDOM NUMBER					RETR	SING	PRIQ	1

1	2	3	4	5	6	7	8	OCTET
ERROR BIT MAP								ACK

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

TEMPORARY FRAME IDENTIFICATION FOR ARQ IN A RESERVATION-SLOTTED-ALOHA TYPE OF PROTOCOL

BACKGROUND

5 Applicant's invention relates to mobile packet radio systems that use a reservation-slotted-ALOHA type of protocol, and more particularly to automatic repeat request (ARQ) in such systems.

 In a mobile packet radio communication system, a base station (BS) communicates with a number of mobile stations (MSs) via one or more shared packet
10 radio channels. Such mobile packet radio systems are described in U.S. Patent No. 4,887,265 to Felix and in K. Felix, "Packet Switching in Digital Cellular Systems", Proc. 38th IEEE Vehicular Technology Conf. pp. 414-418 (June 1988). Similar systems are described in U.S. Patent No. 4,916,691 to Goodman and in "Cellular Digital Packet Data (CDPD) System Specification", Vol. 1, "System
15 Overview", Release 1.0 (July 19, 1993). Packet data communication in the European Global System for Mobile Telecommunication (GSM) is described in P. Decker, "Packet Radio in GSM", Tech. Doc. SMG 4 58/93, European Telecommunications Standards Institute (ETSI) (Feb. 12, 1993); in P. Decker et al., "A General Packet Radio Service Proposed for GSM", Aachen University of Technology (Oct. 13,
20 1993); in J. Hämäläinen et al., "Packet Data over GSM Network", Tech. Doc. SMG 1 238/93, ETSI (Sept. 28, 1993); and in European Patent Publication No. 0 544 464 to Beeson et al.

 Downlink (BS to MS) traffic is scheduled by the BS to avoid contention, but to get access to the BS, MSs use random multiple access that inevitably leads to
25 contention for uplink (MS to BS) traffic. Also for both directions, it is necessary that each data packet include an identification that uniquely designates the MS communicating with the BS (i.e., identifying the MS either as the recipient or as the sender of the data packet). It is desirable that such identifications facilitate implementation of an efficient radio protocol producing little overhead and being
30 robust in various error situations.

 The mobile packet radio communication system may have a single communication channel optimized for packet data, which is to say that both packet

-2-

transfer and associated control signalling are conveyed across the same channel. On the other hand, the radio communication system may instead be a trunked multi-channel system.

A trunked multi-channel mobile packet radio communication system is described in U.S. Patent Application No. 08/354,874 filed December 9, 1994, by L. Billström et al. for "Apparatuses and Mobile Stations for Providing Packet Data Communication in Digital TDMA Cellular Systems" and in corresponding Swedish Patent Application No. 9304119-2 filed December 10, 1993, both of which are incorporated here by reference. A trunked multi-channel mobile packet radio communication system is also described in "Tentative GPRS System Concepts", Tech. Doc. SMG GPRS 17/94, ETSI (May 1994). The abbreviation "GPRS" stands for "General Packet Radio Service".

In current cellular radio communication systems, radio channels are implemented by frequency modulating radio carrier signals, which in many systems have frequencies near 800 megahertz (MHz). In a TDMA cellular radiotelephone system, each radio channel is divided into a series of time slots, each of which contains a burst of information from a data source, e.g., a digital computer. During each time slot in a GSM-type system for example, 114 bits are transmitted, of which the major portion is information to be transmitted, including bits due to error correction coding, and the remaining portion is used for guard times and overhead signalling for purposes such as synchronization. Other systems transmit other numbers of bits during each slot (for example, 324 bits per slot in a system according to the digital advanced mobile phone service (D-AMPS) used in North America), and this should not be considered as limiting Applicant's invention.

The time slots are grouped into successive TDMA frames having a predetermined duration. In a GSM-type system for example, a frame comprises eight time slots. The number of different users that can simultaneously share the radio channel is related to the number of time slots in each TDMA frame. In general, the maximum number of users is the number of slots in each frame, but it is possible that one user may be assigned more than one slot in each frame. The successive time

-3-

slots assigned to the same user, which may or may not be consecutive time slots on the radio carrier, can be considered a logical channel assigned to the user.

For a better understanding of the structure and operation of Applicant's invention, a communication system may be considered as having at least three layers.

- 5 Layer 1 (L1) is the physical layer, which defines the parameters of the physical communication channel, e.g., radio frequency spacing, carrier modulation characteristics, etc. Layer 2 (L2) defines the techniques necessary for the accurate transmission of information within the constraints of the physical channel (L1), e.g., error correction and detection, etc. Layer 3 (L3) defines the procedures for
10 transparent transfer of information over the L2 data link layer.

- Since each TDMA time slot has a certain fixed information carrying capacity, each burst typically carries only a portion of an L3 message. In the uplink direction, multiple mobile stations attempt to gain access to the channel resources on a contention basis, while multiple mobile stations listen for L3 messages sent from the
15 system in the downlink direction. In known systems, any given L3 message must be carried using as many TDMA channel bursts as required to send the entire L3 message.

- Referring to Fig. 1, a data packet that is to be transmitted over a GSM-type air-interface typically comprises a user data portion and a layer-3 header portion L3H.
20 The packet is formatted, normally after encryption, into a frame comprising an information field and a frame header FH. The frame is then segmented into as many blocks as are needed. Each block comprises a block header BH, an information field, and a BCS field, and each block is transmitted as four bursts in consecutive TDMA frames.

- 25 As illustrated in Fig. 2, an exemplary frame header FH might comprise forty-eight bits that carry the following information: the identity of the MS (thirty-two bits, or four octets), the length of the frame in octets (ten bits, or one octet plus two bits), the type of the frame (three bits), a mobile/stationary flag (one bit), and a frame sequence number (two bits). It is possible to extend a frame header FH by setting the
30 frame-type bits to predetermined values, e.g., 111. It will be appreciated that Fig. 2

-4-

shows only one possible example and that a great variety of other examples are possible.

Control messages such as channel reservation messages and acknowledgment messages occupy two time slots, while random access requests and reserved access
5 acknowledgments are one-slot messages. These messages are discussed in more detail below.

It will be noted that every frame transferred across the air-interface includes a unique identification number of a MS, typically in the frame header (see Fig. 1). In "ordinary" GSM, the unique global identification number of a MS is the International
10 Mobile Subscriber Identity (IMSI). Some systems apply an identity-confidentiality service for IMSIs, in which case a Temporary Mobile Subscriber Identity (TMSI) that has significance only within a particular LA is used. Outside the LA, a TMSI is combined with a Location Area Identifier to maintain unambiguous identification. See
15 "European Digital Cellular Telecommunications Systems (Phase 2); Mobile Radio Interface Layer 3 Specification", GSM 04.08, Version 4.9.0, Section 4.3.1, ETSI TC-SMG (July 1994). Although another type of complete identity of a MS might be used in the frame header (e.g., a CDPD identity comparable to the TMSI), in this example it is assumed to be the TMSI.

Because the TMSI can be up to four octets in length and the frame itself is
20 fragmented into blocks, much overhead is created if every block must include the TMSI, i.e., carry the same amount of addressing information. This is also true for blocks that are retransmitted after errors. Therefore, only the first block in the complete or partial data frame usually carries the complete identification of a MS. Thus in the case of retransmission, an additional primary block may have to be added
25 to the partial data frame to be retransmitted, in order to accommodate the MS's complete identification. This itself is an increase in overhead that is undesirable.

SUMMARY

In accordance with one aspect of Applicant's invention, a method of
30 implementing ARQ in a mobile packet data communications system using a

-5-

reservation slotted-ALOHA protocol comprises the step of assigning a temporary frame identity (TFI) to each data frame transmitted to a mobile station. The assigned TFI is unique among concurrent frame transfer sequences in a cell, and may be assigned based on information in a data frame sent to the mobile station or based on
5 information in a channel reservation message that precedes the data frame sent to the mobile station.

In another aspect of Applicant's invention, a method of implementing ARQ in a mobile packet data communications system using a reservation slotted-ALOHA protocol comprises the step of assigning a TFI to each data frame transmitted from a
10 mobile station. The TFI is assigned based on information in a channel reservation message that precedes a data frame sent from the mobile station, and the TFI assigned is unique among concurrent frame transfer sequences in a cell.

The TFI is included in every block belonging to a particular frame, a block being the unit of data on which ARQ is based. A partial data frame to be
15 retransmitted in case of a transmission error contains only the blocks determined by the ARQ protocol type (e.g., selective, and Go-back-N) used, whereby a primary block need not be added to identify the mobile station. Blocks belonging to frames destined for different mobile entities can be multiplexed on the downlink based on the TFI. The mobile station may include, in its random access request, an indication that
20 a TFI is already assigned.

With Applicant's invention, the first block of a data frame transmission may be erroneous and still the remaining blocks can be correctly received and correctly associated with a particular frame and a particular mobile station. In case of an uncompleted frame transfer caused by an erroneous acknowledgment message from
25 the mobile station, communication can be resumed if the base station sends a message with the TFI of the frame whose transfer was disrupted (e.g., by retransmitting the first block of the last transmission). In case of an uncompleted frame transfer caused by an erroneous acknowledgment message from the base station, communication can be resumed if the mobile station sends a random access request and, after receiving a

-6-

channel reservation, the TFI of the frame whose transfer was disrupted (e.g., by retransmitting the first block of the last transmission).

BRIEF DESCRIPTION OF THE DRAWINGS

5 Applicant's invention is described below in more detail with reference to embodiments that are given only by way of example and that are illustrated in the accompanying drawings, in which:

Fig. 1 illustrates the block and frame structure of data packets;

Fig. 2 illustrates the structure of a frame header;

10 Figs. 3A, 3B illustrate structures of block headers;

Figs. 4A, 4B show message sequences across the air-interface for mobile-originated (MO) packet transfers;

Figs. 4C, 4D, 4E show message sequences across the air-interface for mobile-terminated (MT) packet transfers;

15 Fig. 5 shows the structure of a random access request message;

Fig. 6 shows the structure of a short acknowledgement message;

Fig. 7 illustrates a GSM-type communication system having packet data functions;

Fig. 8 illustrates the protocol architecture of the system of Fig. 7; and

20 Fig. 9 illustrates another GSM-type communication system having packet data functions.

DETAILED DESCRIPTION

The TDMA structure and the need to allow for some degree of timing misalignment at first random access led to Applicant's selection of a reservation-slotted-ALOHA type of protocol for use in a GSM-type packet communication system as described in this application. Nevertheless, it will be understood that Applicant's invention can be embodied in other system platforms as well.

30 In accordance with Applicant's invention, a unique temporary frame identity (TFI) is assigned to each frame to be transferred. The TFI is of local character in the

-7-

particular cell in which the transfer is to take place. In other words, the particular TFI assigned to a frame is dependent on the cell in which the transfer is to take place and is different from other TFIs used in concurrent packet transfers in that cell. Every block in a frame includes the same TFI, viz., the TFI uniquely assigned to the blocks' particular frame, and blocks that must be retransmitted include their original TFIs. It will be appreciated that the TFI substantially replaces the combination of the TMSI and the frame sequence number FN that is ordinarily included in blocks to be transferred.

Also in accordance with Applicant's invention, each block contains a respective block sequence number for indicating the relative position of the block in the frame. Applicant's combination of the block sequence number and the TFI unambiguously identifies an individual block as a specific block within a particular frame. In this way, Applicant's invention provides an ARQ protocol without requiring inclusion of a primary block in each retransmitted frame. It will be appreciated that although this description focusses on selective ARQ, Applicant's invention may be applied to other types of ARQ protocol, e.g., "Go-back-N continuous" ARQ, which is described in the literature, including F. Halsall, Data Communications, Computer Networks and OSI, Addison-Wesley Publishing Co. (1989).

Thus, in accordance with Applicant's invention and as shown in Figs. 3A, 3B, a block header typically comprises the TFI (eight bits), the block sequence number (five bits), a type of the block (two bits), and a poll/final bit. The block header of the primary block in a frame (Fig. 3A) advantageously further comprises a number of random access tries (e.g., four bits), with the remaining bits of the additional octet being available for other uses. In the example illustrated, the length of a block header BH in a primary block is twenty-four bits (three octets), and the length of a block header BH in a following block (Fig. 3B) is sixteen bits (two octets).

Assignment and release of TFI values are administrative services provided by the media access layer management on the network side. The minimum size of the TFI field is determined by the number of possible concurrent packet transfers in one

-8-

cell. It is currently believed that eight bits is a good balance of instantaneous capacity against overhead, but other balances could be struck of course. The TFI values can be continually reused, thus distinguishing subsequent packet transfers from earlier ones.

5 For an MO packet transfer, the BS assigns the TFI as a part of the channel reservation procedure and sends the TFI to the MS in a channel reservation command ChRe. For an MT packet transfer, the BS sends both the mobile's TMSI and the TFI assigned to the particular frame in the primary block of the frame. The TMSI is sent as the part of the frame header FH, and the TFI is sent as the part of the block
10 headers BH. In this way, the MS is informed of the TFI for the current frame transfer.

 It is currently preferred that every block in a frame transmitted across the air-interface, whether on the uplink or the downlink, include the same TFI, which unambiguously identifies that particular frame. It is not strictly necessary for TFIs to
15 be included in blocks transmitted in a scheduled uplink transfer, but their presence adds to the robustness of the protocol.

 An exemplary radio link protocol using Applicant's invention is a selective-ARQ type of protocol. Selective ARQ means only erroneous blocks are retransmitted. Basic scenarios are presented in Figs. 4A-4E that should be sufficient
20 for those of ordinary skill in this art, and the following description is based on the patent applications cited above that have been incorporated here by reference.

 In a GSM-type packet communication system using a reservation-slotted-ALOHA type of protocol, a MS initiates a packet transfer by transmitting a random access request Ra on a packet data channel (PDCH) uplink when allowed to do so.
25 This so-called random access sub-channel is determined by uplink state flags (USFs) marked as "free" (indicated as $USF = f$ in Figs. 4A-4E) or "reserved" (indicated as $USF = R$ in Figs. 4A-4E) on the PDCH downlink. As seen in Fig. 5, the random access request Ra uses the same type of access burst as in ordinary GSM, and comprises a five-bit random number for providing an initial identification of the MS,
30 and other information that is described below.

Figs. 4A-4E illustrate message sequences across the air-interface for mobile-originated (MO) and mobile-terminated (MT) packet transfers. An index for time slots numbered 1 through 51 is shown across the top of Fig. 4A.

- As illustrated in Fig. 4A, packet transfer in the MO direction starts with a
- 5 mobile's transmitting a random access request Ra. The MS checks that the USF = f, and if it is, the MS transmits the random access request in the next time slot. If the USF = R, the MS typically would wait until the USF = f, randomly select one of a predetermined number of subsequent time slots, and transmit the random access request in the selected slot if the USF is still free.
- 10 The normal response from the system to such a random access request is a BS's transmitting a channel reservation command ChRe, reserving future slots (USF = R) for uplink transfer of a variable length data packet. The channel reservation command ChRe is sent on the PDCH downlink and usually includes a request reference and a timing advance. The purpose of the request reference
- 15 information is to address the particular MS by providing the random access information used in the access request Ra and a frame number FN modulo 42432 for the TDMA frame in which the access request was received (see "European Digital Cellular Telecommunications Systems (Phase 2); Mobile Radio Interface Layer 3 Specification", GSM 04.08, Version 4.9.0, Section 10.5.2.30, ETSI TC-SMG (July
- 20 1994)). If the system does not respond to the mobile's random access request Ra, the MS makes a retry after a random backoff time.

- After the MS transmits a data frame in the reserved time slots, the BS transmits a positive acknowledgment message Ack if the whole data frame was correctly received. In the example illustrated in Fig. 4A, the data frame transmitted
- 25 by the MS consists of four blocks, or sixteen bursts (time slots 16-31). If the data frame was received with an error, the BS transmits a two-burst negative acknowledgment message Nack, in response to which the MS retransmits only the erroneous blocks as a partial frame. This is illustrated by Fig. 4B: the third block of the frame (time slots 24-27) was received with an error, prompting transmission of a

-10-

Nack message by the system in slots 34, 35, a retransmission of the third block by the MS in slots 40-43, and transmission of an Ack message by the system in slots 46, 47.

Referring to Figs. 4C-4E, packet transfer in the MT direction starts with a paging message transmitted by the system on the PDCH downlink. To economize on radio spectrum, paging is limited to the smallest possible group of cells based on location area (LA), the mobile's recent cell location history, and MS submode. A paging message may include reservation of an access slot on the PDCH uplink for the MS's response to the paging message. After receiving a paging response from the MS, the system sends a data frame to the MS. Under certain conditions, e.g., when the cell location of a MS is known with a high degree of probability, data sent in the MT direction is sent directly as "Immediate Data" without a preceding paging message. This situation is illustrated in Figs. 4C-4E.

The MS replies to an "Immediate Data" transmission by sending an acknowledgement message in a reserved access slot. The acknowledgment message can be either a short (one burst) Ack message if all blocks were correctly received (see Fig. 4C) or a short (one burst) Nack message if all blocks were not correctly received (see Figs. 4D, 4E). As illustrated in Fig. 6, the short Nack message includes a bitmap indicating the erroneous blocks, at least for smaller packets (e.g., up to seven blocks), and an acknowledgment flag (ACK in Fig. 6). If the acknowledgment flag is set to a predetermined value, e.g., 1, then all blocks have been received without errors. If a bit in the bitmap is set to a predetermined value, e.g., 1, an error in the corresponding block is indicated. In the situation illustrated in Fig. 4D, the frame consisted of four blocks, the third of which was incorrectly received; the ACK flag in the short Nack message sent by the MS was then set to 0 and with the bitmap caused the system to retransmit the third block.

For larger packets (i.e., more than seven blocks), the short Nack message indicates to the system that a channel reservation is needed for a longer (two burst), complete negative acknowledgment message Nack. This can be indicated by setting the values of all bits in the bitmap to the value indicating no errors, e.g. 0, and at the same time setting the value of the ACK flag bit to 0, indicating errors. In Fig. 4E,

-11-

blocks 8, 9, and 10 were incorrectly received, and the system responded to the mobile's short Nack message (all zeroes) with the reservation message ChRe indicating reserved time slots for a long (two-burst) Nack that includes a complete bitmap for all blocks in the frame.

5 The structure of the two-burst acknowledgement message comprises the TFI, the Ack/Nack indicator, and a list (bitmap) of erroneously received blocks. On the downlink, the two-burst acknowledgement message also includes a channel reservation for retransmission. The MS transmitted the long (two-burst) Nack message in the assigned slots, and that message indicated to the system that retransmission of
10 blocks 8, 9, and 10 was needed. For either short or long negative acknowledgement messages, partial frames that consist of not-acknowledged blocks are sent by the system until a positive acknowledgment message is received from the MS.

 Thus in accordance with Applicant's invention, each transmission of a complete or partial frame is followed by an acknowledgment message that includes the
15 TFI of the frame to which it refers and, if needed, a list of the blocks that were erroneous. Since a one-burst Ack/Nack message is sent only in a reserved slot, the sending mobile station is indirectly identified and does not need to include the TFI in the one-burst Ack/Nack message. Partial frames that consist of retransmitted not-acknowledged blocks are sent until a positive acknowledgment is received, viz., until
20 reception of an acknowledgement message that does not include a list of erroneous blocks.

 A TFI remains valid even if the communication is disrupted for some short period of time. For example, when an erroneous acknowledgment message is sent by the BS, the MS can reestablish the communication by sending a random access
25 request message Ra that notifies the BS that a TFI is already assigned. As illustrated in Fig. 5, the random access request message Ra advantageously comprises a single octet in which some bits (e.g., five) convey the pseudo-random number identifying the MS, one bit (RETR in Fig. 5) indicates an initial/retransmission request, one bit (SING in Fig. 5) indicates whether the MS intends to transmit only a single block on
30 the uplink, and another bit (PRIO in Fig. 5) indicates a priority. The pseudorandom

-12-

number is used to distinguish access requests from different mobiles. The initial/retransmission request indicates that a TFI is already assigned.

Upon receiving the channel reservation message ChRe sent by the BS in response to the random access message Ra, the MS can identify and resume the
5 uncompleted frame transfer by restating its TFI (e.g., by retransmitting the primary block of the incomplete transfer), and the BS can then continue the frame transfer by sending the same acknowledgment message that was erroneous in the previous transmission. Operation in this way has significant advantages. When reestablishing communication with a BS in case of an uncompleted packet transfer (e.g., a missing
10 acknowledgment message from the BS), it is sufficient to state the TFI of the frame whose transfer was interrupted (e.g., by retransmitting the first block of the last transmission).

After a frame is successfully transferred across the air-interface, viz., after a positive acknowledgment has been received, the network-side layer management entity
15 can release the TFI value and make it available for future use. Release of the TFI value can also occur in the case of persistent loss of response from an MS or when a MS roams to another cell.

It should be appreciated that Applicant's invention provides a communication system having many advantages over other systems. The TFI is a short identity that
20 replaces the combination of the TMSI and frame sequence number FN during frame transfers across the air-interface. Also, the combination of the TFI and the block sequence number unambiguously identifies a block in a particular frame sent to/from a particular MS. Moreover by using a TFI as a part of every block's header, there is no need for the additional primary block that is necessary for each retransmitted
25 partial data frame in order to accommodate the complete identification of the MS. Furthermore by including a TFI in every block of a frame, the first block of the frame can be incorrectly received and still the remaining blocks can be correctly received and correctly associated with a particular frame and a particular MS.

As a result of Applicant's invention, the scheduling of downlink traffic is made
30 simpler, more flexible, and more spectrum efficient for the following reasons:

-13-

(1) blocks belonging to frames destined for different MSs can be multiplexed on the same downlink channel (e.g., while waiting for an acknowledgment message from a first MS, a few blocks can be sent to a second MS, thereby fully utilizing the downlink spectrum); (2) the downlink transmission of a data frame comprising a plurality of blocks can be interrupted, for example by a control message to some other MS, and then resumed; and (3) if more than one data channel is available for the downlink traffic, blocks belonging to the same frame can be transmitted on different channels and the intended MS can still properly receive them, provided the MS is capable of monitoring multiple channels in parallel.

10 As described above, Applicant's invention may be applied in a digital TDMA cellular radiotelephone system having a GSM-type architecture. In one such system that is described first below, packet data services are added to a GSM-type system in a closely integrated way, using current GSM infrastructure to the maximum extent possible. The second such system described below uses primarily the BS portion of a
15 GSM network and adds a separate mobile packet data infrastructure for the other network parts.

Fig. 7 illustrates a GSM system enhanced with packet data (PD) functions, the major PD function blocks being indicated by bold contour lines. A plurality of base transceiver stations (BTSs), each providing radio communication service to multiple
20 MSs in a respective cell, together provide complete coverage of the GSM public land mobile network (PLMN) service area. Only one BTS and one MS, which comprises a mobile termination (MT) part and a terminal equipment (TE) part, are shown schematically in Fig. 7. The functional units of the BTS carry out the above-described steps of assigning, to each data frame transmitted to an MS, a TFI that is
25 unique among other TFIs assigned to data frames concurrently transmitted to other mobile stations.

A group of BTSs is controlled by a base station controller (BSC), and these together form a base station system (BSS). In the preceding description, a BS may be considered as a combination of a BTS and its BSC. One or more BSSs are served by
30 a mobile services switching center (MSC) and an associated visitor location register

-14-

(VLR). The MSC controls calls to and from other networks, such as the public switched telephone network (PSTN), an integrated services digital network (ISDN), and other PLMNs. An MSC equipped for routing incoming calls is referred to as a gateway MSC (GMSC). One or more MSC service areas together constitute the
5 PLMN service area.

The MSC/VLR(s) communicate with a home location register (HLR) via a common channel signalling (CCS) system No. 7 network, which is standardized by the International Telegraph & Telephone Consultative Committee (CCITT), now the International Telecommunications Union (ITU). The HLR is a data base comprising
10 information on all subscribers, including location information identifying the MSC/VLR where a subscriber is currently (or was last) registered. Connected to the HLR is an authentication center (AUC) that provides the HLR with authentication parameters. To allow identification of subscriber equipment, an equipment identity register (EIR) is also connected to the MSC(s). Finally, an operations and
15 maintenance center (OMC) may be included for providing overall network support.

The packet data functionality in the BTS includes capability to provide one or more shared PDCHs, depending on demand. In a cell only occasionally visited by a packet data user, a PDCH may be allocated temporarily on user demand. In a cell having continuous packet data traffic demand, one or more PDCHs may be allocated
20 either semi-permanently or dynamically, adapted to the current load situation. The allocation of PDCHs is controlled from the BSC. Information defining the support level and any PDCH allocated for initiating packet transfer is broadcast on a conventional GSM broadcast control channel (BCCH).

The packet data radio link protocol over the PDCH(s) allocated in a cell is
25 handled by a PD transfer controller in the BTS. In a BTS having at least one PDCH allocated, the PD transfer controller has a physical connection for packet transfer to and from the MSC. The physical connection is typically unique and uses ordinary internode trunks.

The MSC/VLR includes a PD router for routing packets to and from the MSC
30 service area and a PD signalling controller for handling signalling exchange with a

-15-

circuit mode MSC. The PD signalling controller also handles control, monitoring, and parameter storage functions related to packet data MSs. The PD controller comprises a processor, memory, signalling interface functions, and software.

Although the PD router and PD signalling controller are shown as parts of the MSC/VLR, it will be understood that either or both, in whole or in part, could be physically realized as external equipment attached to the MSC.

MSCs (PD routers) are interconnected via a backbone network, to which one or more interworking functions (IWFs) are also connected. IWFs enable internetworking with external network(s), such as the Internet (i.e., IP network) and/or a packet switched public data network (PSPDN) (i.e., an X.25 network), thus interconnecting fixed stations (FSs) with the MSs. An IWF may perform protocol conversion and address translation, as required, and an IWF may also route packet data traffic between cooperating PLMNs. Packet data traffic between MSs in different MSC service areas in the same PLMN is normally routed directly between the respective MSCs, across the backbone network. For routing purposes, the HLR may be interrogated from entities on the backbone network through an HLR interrogation server, which provides the functions necessary for such interrogation from the packet data network. The AUC, EIR, OMC, and HLR interrogation server may also be enhanced from time to time to support new types of subscriptions, services, and equipment.

The basic packet data network service provided by a cellular packet data PLMN such as that illustrated in Fig. 7 is a standard connectionless network (datagram) service based on a standard connectionless IP protocol. The term "IP protocol" should be understood to denote either the Internet Protocol (the de facto standard IP protocol used in the TCP/IP protocol suite) or the International Standards Organization (ISO) Internetwork protocol ISO 8473. Value-added services, including multicast, broadcast, and electronic mail services, may be provided by Network Application Server(s) (NAS(s)), attached to the backbone network and accessed by using higher layer protocols on top of the IP. Thus, from a packet data communication point of view, the PLMN basically appears as an IP network.

-16-

The protocol architecture is illustrated by Fig. 8, which shows an example of communication between an MS and an FS, e.g., a host computer, attached to an external IP network. Thus, the IWF and MSC both play the role of IP (layer 3) routers, and the MS and FS can communicate end-to-end using a transmission control
5 protocol (TCP), or transport (layer 4) protocol. For the architecture illustrated in Fig. 8, the MT and TE parts of the MS would be integrated in one unit.

Between the MSC and the MS, the BTS acts as a link layer (layer 2) relay between the radio link protocol (denoted RL2 in Fig. 8) and the link protocol (denoted L2) used across the trunk connection. The radio protocol handled by the BTS is
10 Applicant's ARQ type of protocol described above. In contrast to ordinary GSM, encryption/decryption is performed between the MT part of the MS and the MSC. An MS is identified on layer 3 with an IP address and on layer 2 with standard GSM identities: the IMSI, or more typically, the TMSI.

Another GSM-type system that can benefit from Applicant's invention is
15 schematically illustrated in Fig. 9, in which the major PD function blocks are indicated by bold outlines. In Fig. 9, only the BSS portion of the GSM infrastructure is utilized for packet data. The PD functions in the BTS are almost the same as in the system illustrated in Fig. 7, as are the PDCH-allocation functions in the BSC. Again, the functional units of the BTS carry out the above-described steps of assigning, to
20 each data frame transmitted to an MS, a TFI that is unique among other TFIs assigned to data frames concurrently transmitted to other mobile stations.

As illustrated in Fig. 9, the packet data transfer connection of a BTS is coupled to a separate Mobile Packet Data Infrastructure (MPDI) instead of a PD router in the MSC/VLR. The MPDI provides the necessary packet routing, mobility
25 management, authentication, and network management functions. Together, the MPDI and the portions of BSS(s) utilized for packet data constitute a mobile packet data system. With respect to GSM, the system may be regarded as a separate system, and a GSM operator may choose to lease radio channel capacity to a separate packet data system operator. An MS requiring both packet data and regular GSM services
30 may then need a separate subscription in each system. The packet data services

-17-

provided by the system may (depending on the functionality of the MPDI) be the same as those provided by the system illustrated in Fig. 7.

In the system shown in Fig. 9, the only radio channels available for MSs are PDCHs and regular GSM broadcast channels. Thus, registration, location updating
5 (or cell location reporting), authentication, and similar signalling are performed via PDCHs, and thus allocation of a first master packet data channel (MPDCH) on user demand, using ordinary GSM signalling as in Fig. 7, is not possible. With this exception, the functions for providing PDCHs are the same as described for Fig. 7.

The MPDCH is the first PDCH allocated in a cell on which packet transfers
10 are initiated and is normally allocated by system configuration, although the method of using a PDCH of an adjacent cell for requesting allocation of an MPDCH in a "PDCH on demand" cell, prior to moving into that cell, is also feasible. In that case, the allocation request would be transferred to a system entity in the MPDI. This system entity would then send an allocation request to the BTS of the "PDCH on
15 demand" cell in question, and that cell would, in turn, convey the request to the PDCH allocation controller in the BSC.

Regular GSM broadcast control channels are used in the same way as in the system illustrated in Fig. 7 for defining PDCH support level and MPDCH allocated in the cell (via information on BCCH) and for performing cell selection with two
20 alternative criteria for cell selection. Listening to cell broadcast short messages is also possible in a way similar to that of the system in Fig. 7.

Packet transfer across PDCHs may be performed according to the principles described for Fig. 7. The PD transfer controller and associated interface functions in the BTS are also adapted to the interconnection requirements of the MPDI, e.g., to
25 allow interconnection via a routing network. The functions of the MS in the system of Fig. 9 are basically the same as the MS functions in the system of Fig. 7, except for functions related to regular GSM signalling and PD mode, which are not applicable in the system of Fig. 9.

While specific embodiments of the present invention applied to a GSM type of
30 cellular system have been described, it should be understood that the present invention

-18-

may be applied also to other TDMA cellular systems including D-AMPS and PDC systems. Although in these systems, BSC is not provided as a separate functional entity, corresponding base station controller functions and associated new PD functions are instead divided between MSC and base stations.

- 5 It will be understood that Applicant's invention is not limited to the particular embodiments that have been described and illustrated. This application contemplates any and all modifications that fall within the spirit and scope of Applicant's invention as defined by the following claims.

-19-

CLAIMS:

1. In a mobile packet communications system using a reservation slotted-ALOHA protocol in which data frames are exchanged between a base station and mobile stations, a method of implementing automatic repeat request (ARQ),
5 comprising the step of assigning, to each data frame transmitted to a mobile station, a temporary frame identity (TFI); wherein the TFI assigned is unique among other TFIs assigned to data frames concurrently transmitted to other mobile stations.
2. The method of claim 1, wherein the TFI is assigned based on information
10 in the data frame transmitted to the mobile station.
3. The method of claim 1, wherein the TFI is assigned based on information in a channel reservation message that precedes the data frame transmitted to the mobile station.
15
4. The method of claim 1, further comprising the step of including the TFI assigned in an acknowledgment message transmitted by the mobile station.
5. The method of claim 1, wherein a data frame comprises a plurality of data
20 blocks, and the method further comprises the step of including the assigned TFI in every data block in the data frame.
6. The method of claim 5, wherein the base station retransmits only those data blocks that have been received with transmission errors without changing contents of
25 those data blocks.
7. The method of claim 6, wherein a first data block of the data frame is received with a transmission error and remaining data blocks of the data frame are correctly received and correctly associated with the data frame and the mobile station.

30

-20-

8. The method of claim 5, further comprising the step of resuming transmission of an uncompleted data frame, wherein transmission was interrupted by an acknowledgment message erroneously transmitted by the mobile station, by the base station's transmitting a predetermined message that includes the TFI assigned to the uncompleted data frame.

9. The method of claim 8, wherein the predetermined message is a first data block of the uncompleted data frame.

10. The method of claim 6, wherein data blocks in data frames transmitted to different mobile stations are multiplexed on a downlink communication channel based on TFIs assigned to the respective data frames.

11. In a mobile packet communications system using a reservation slotted-ALOHA protocol in which data frames are exchanged between a base station and mobile stations, a method of implementing automatic repeat request (ARQ), comprising the step of assigning, to each data frame transmitted by a mobile station, a temporary frame identity (TFI); wherein the TFI is assigned based on information in a channel reservation message that precedes a data frame transmitted by the mobile station, and the TFI assigned is unique among other TFIs assigned to data frames concurrently transmitted by other mobile stations.

12. The method of claim 11, further comprising the step of including the TFI assigned in an acknowledgment message transmitted by the mobile station.

13. The method of claim 11, wherein a data frame comprises a plurality of data blocks, and the method further comprises the step of including the assigned TFI in every data block in the data frame.

-21-

14. The method of claim 13, wherein the mobile station retransmits only those data blocks that have been received with transmission errors without changing contents of those data blocks.

5 15. The method of claim 14, wherein a first data block of the data frame is received with a transmission error and remaining data blocks of the data frame are correctly received and correctly associated with the data frame and the mobile station.

10 16. The method of claim 13, further comprising the step of resuming transmission of an uncompleted data frame, wherein transmission was interrupted by an acknowledgment message erroneously transmitted by the mobile station, by the base station's transmitting a predetermined message that includes the TFI assigned to the uncompleted data frame.

15 17. The method of claim 16, wherein the predetermined message is a first data block of the uncompleted data frame.

20 18. The method of claim 13, further comprising the step of resuming transmission of an uncompleted data frame transfer, wherein transmission was interrupted by an acknowledgment message erroneously transmitted by the base station, by the mobile station's carrying out the steps of: transmitting a random access request; receiving a channel reservation message; and sending a predetermined message that includes the TFI assigned to the uncompleted data frame.

25 19. The method of claim 18, wherein the predetermined message is a first data block of the uncompleted data frame.

20. The method of claim 18, wherein the mobile station includes an indication that a TFI is already assigned in the random access request.

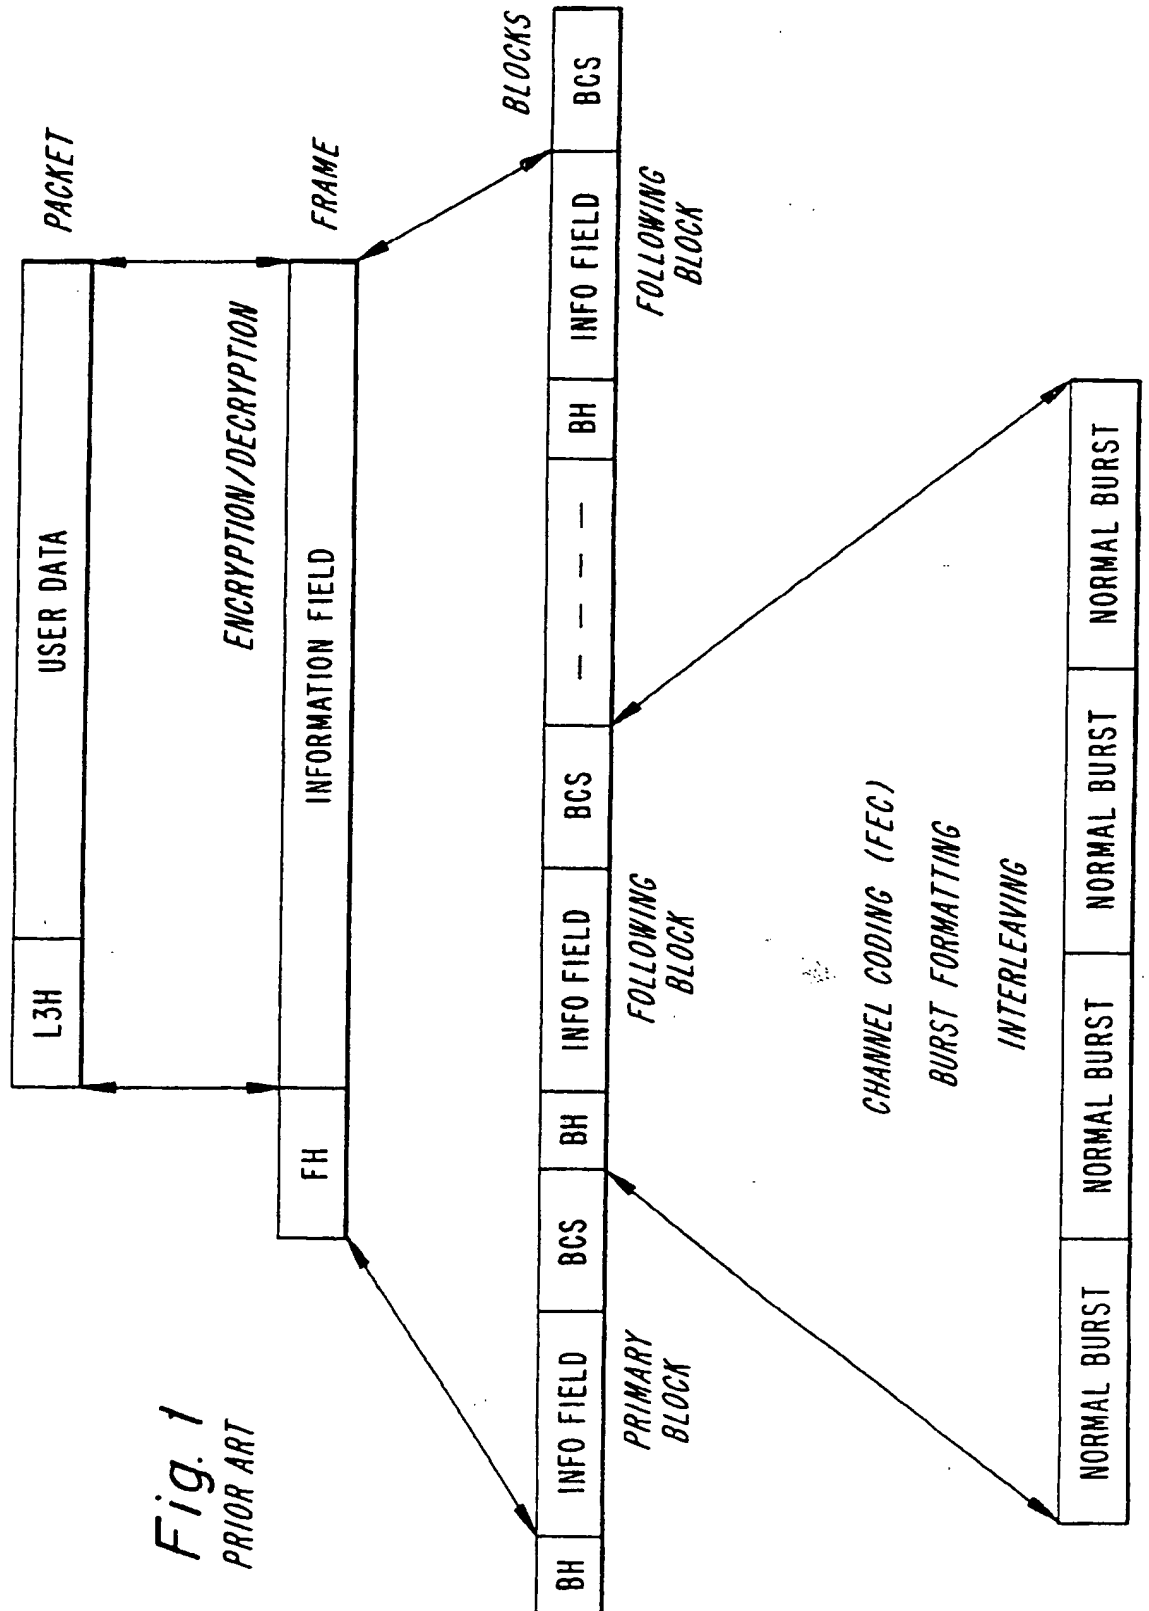


Fig. 1
PRIOR ART

2/6

Fig. 2
PRIOR ART

1	2	3	4	5	6	7	8	OCTET
MS IDENTITY								1
								2
								3
								4
FRAME LENGTH								5
FRAME TYPE				M/S		SEQ NUM		6

Fig. 3A

1	2	3	4	5	6	7	8	OCTET
TFI								1
BLOCK SEQ NUM					TYPE		P/F	2
NUM OF TRIES				FOR FURTHER USE				3

Fig. 3B

1	2	3	4	5	6	7	8	OCTET
TFI								1
BLOCK SEQ NUM					TYPE		P/F	2

Fig. 5

1	2	3	4	5	6	7	8	OCTET
RANDOM NUMBER					RETR	SING	PRI0	1

Fig. 6

1	2	3	4	5	6	7	8	OCTET
ERROR BIT MAP							ACK	1

Fig. 4A.

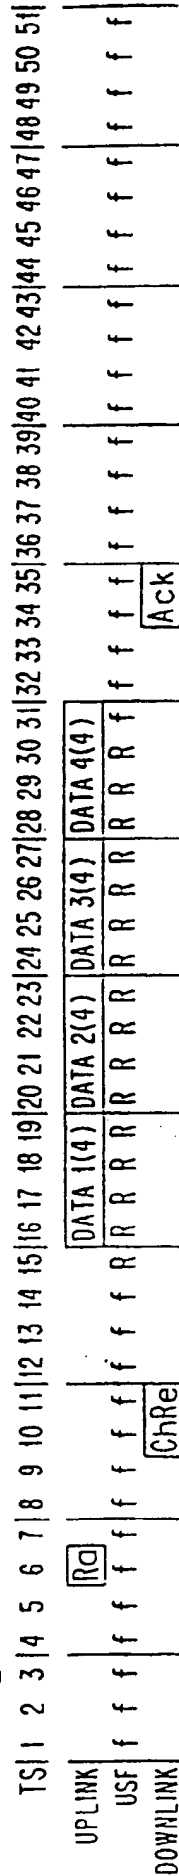


Fig. 4B

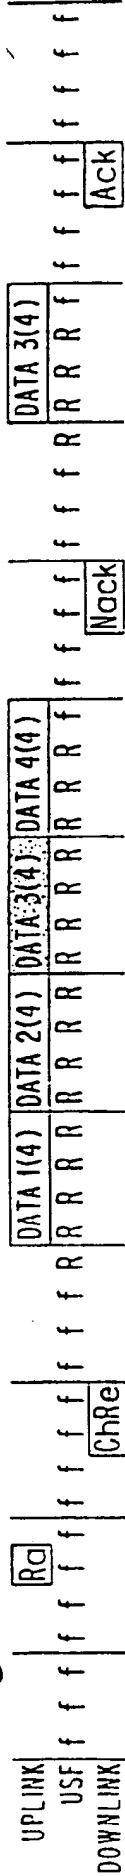


Fig. 4C




Fig. 4D






Fig. 4E

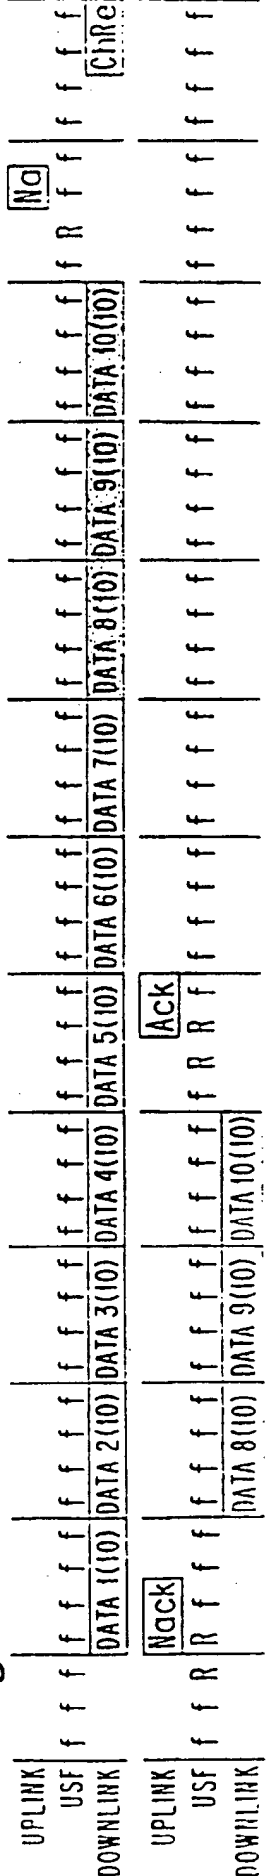

4/6

Fig. 7

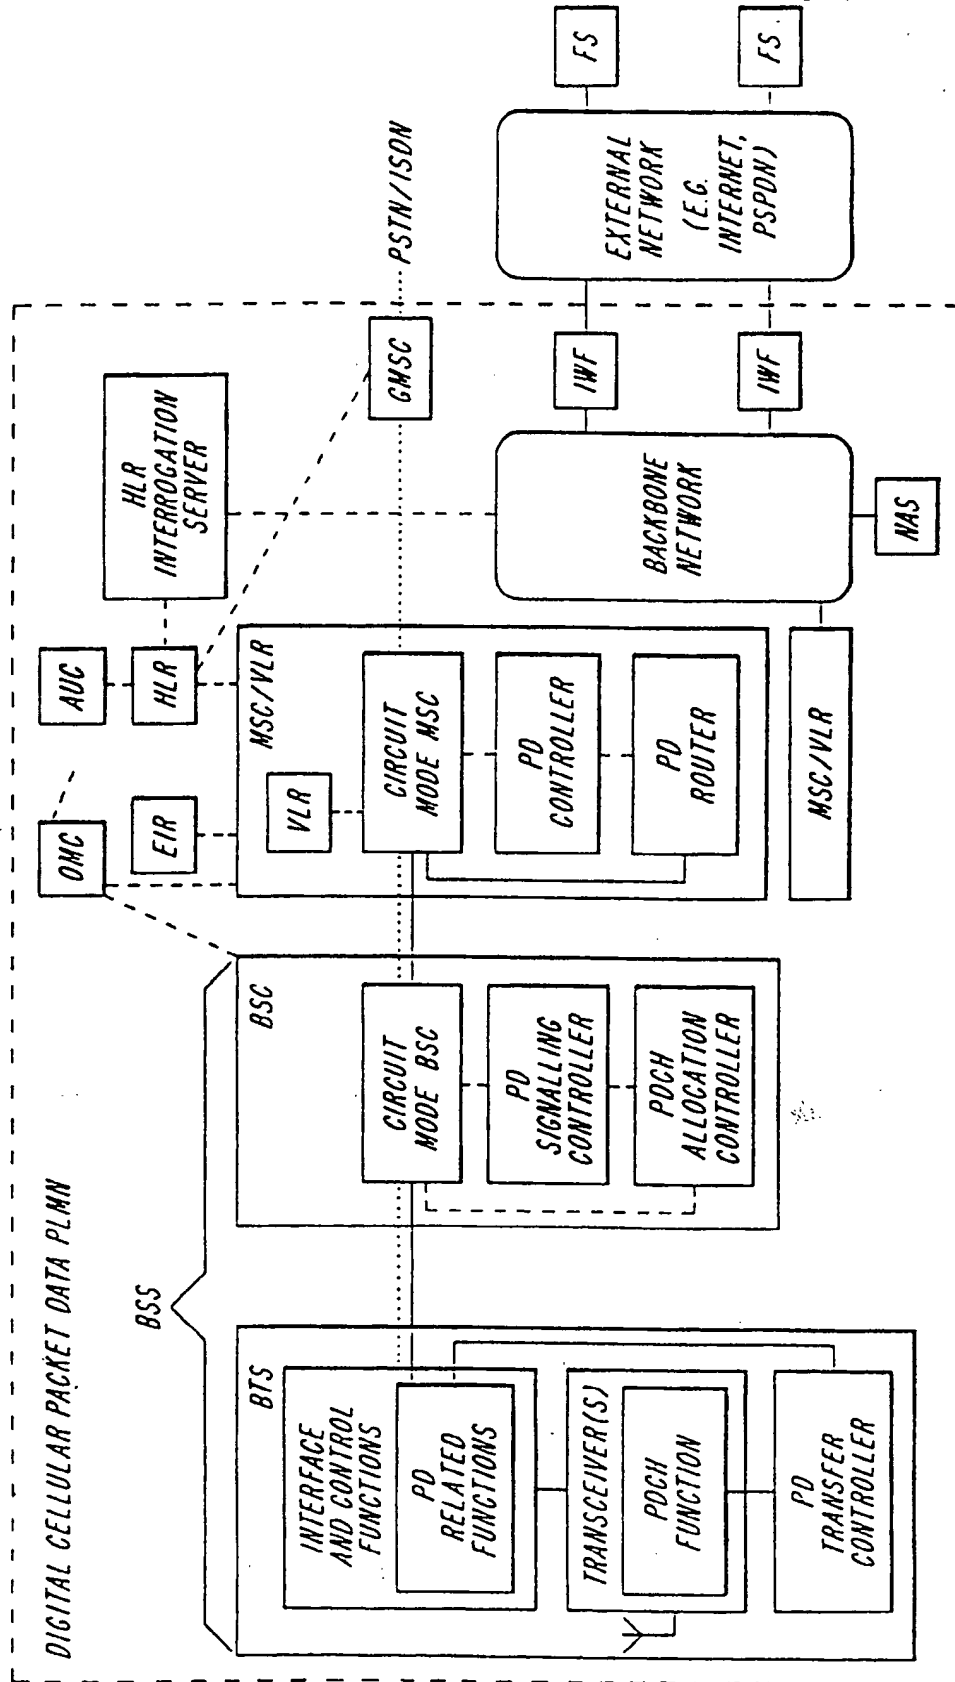

— = PACKET DATA (PD) AND RELATED SIGNALLING
 = CIRCUIT MODE VOICE/DEDICATED DATA AND RELATED SIGNALLING
 - - - - = SIGNALLING

Fig. 8


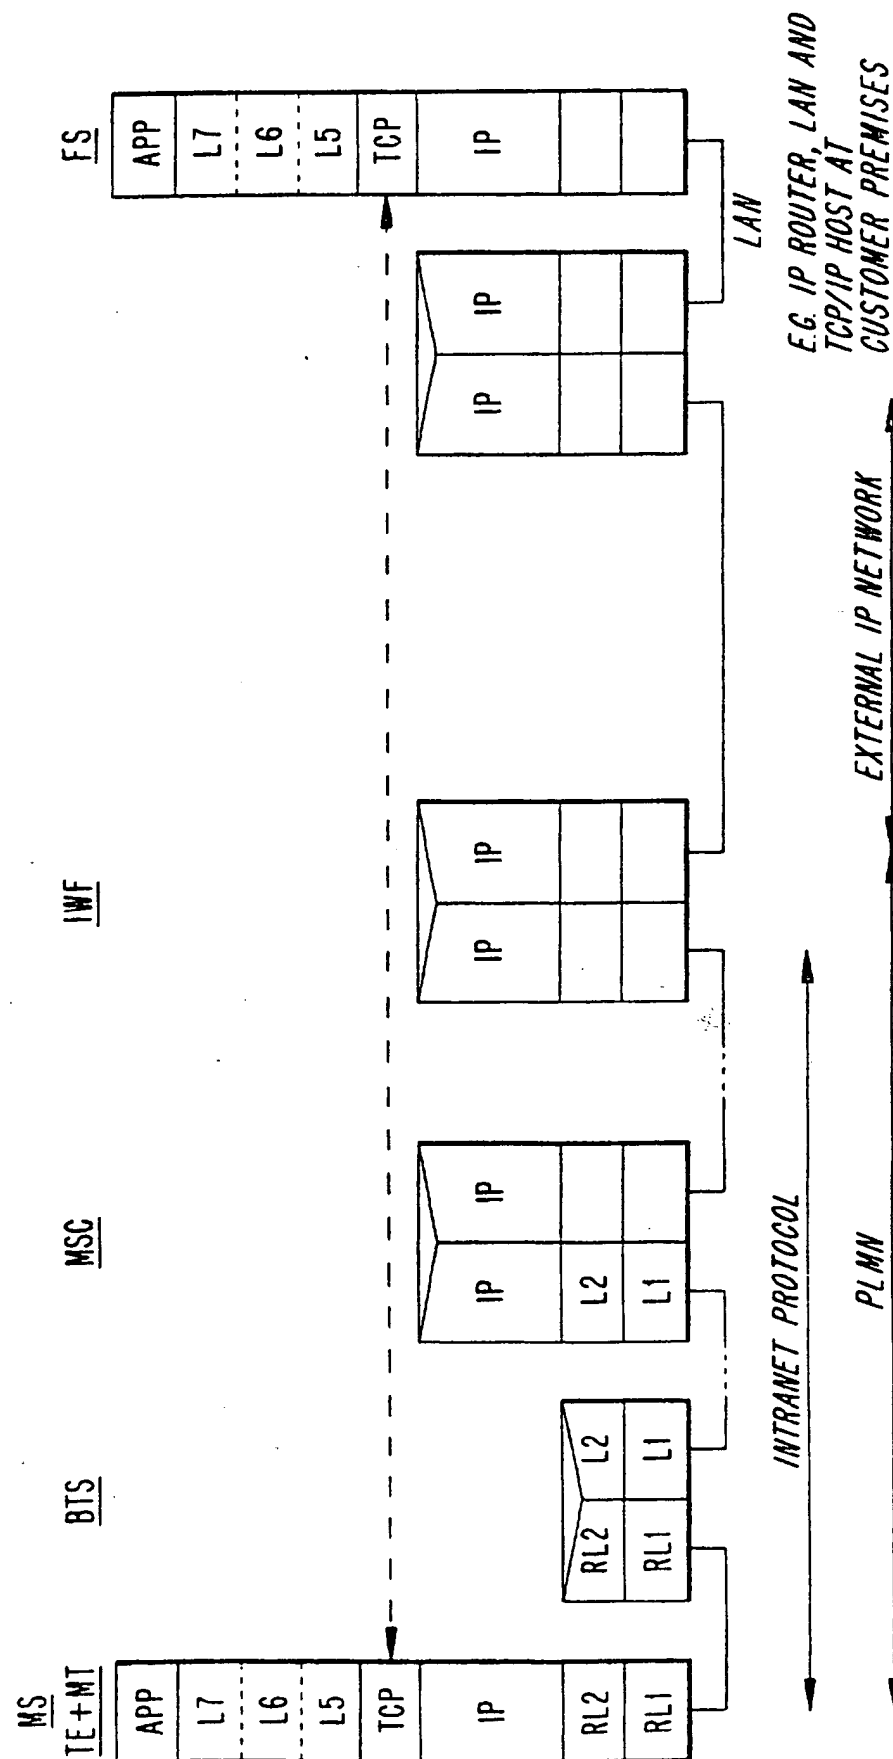


Fig. 9

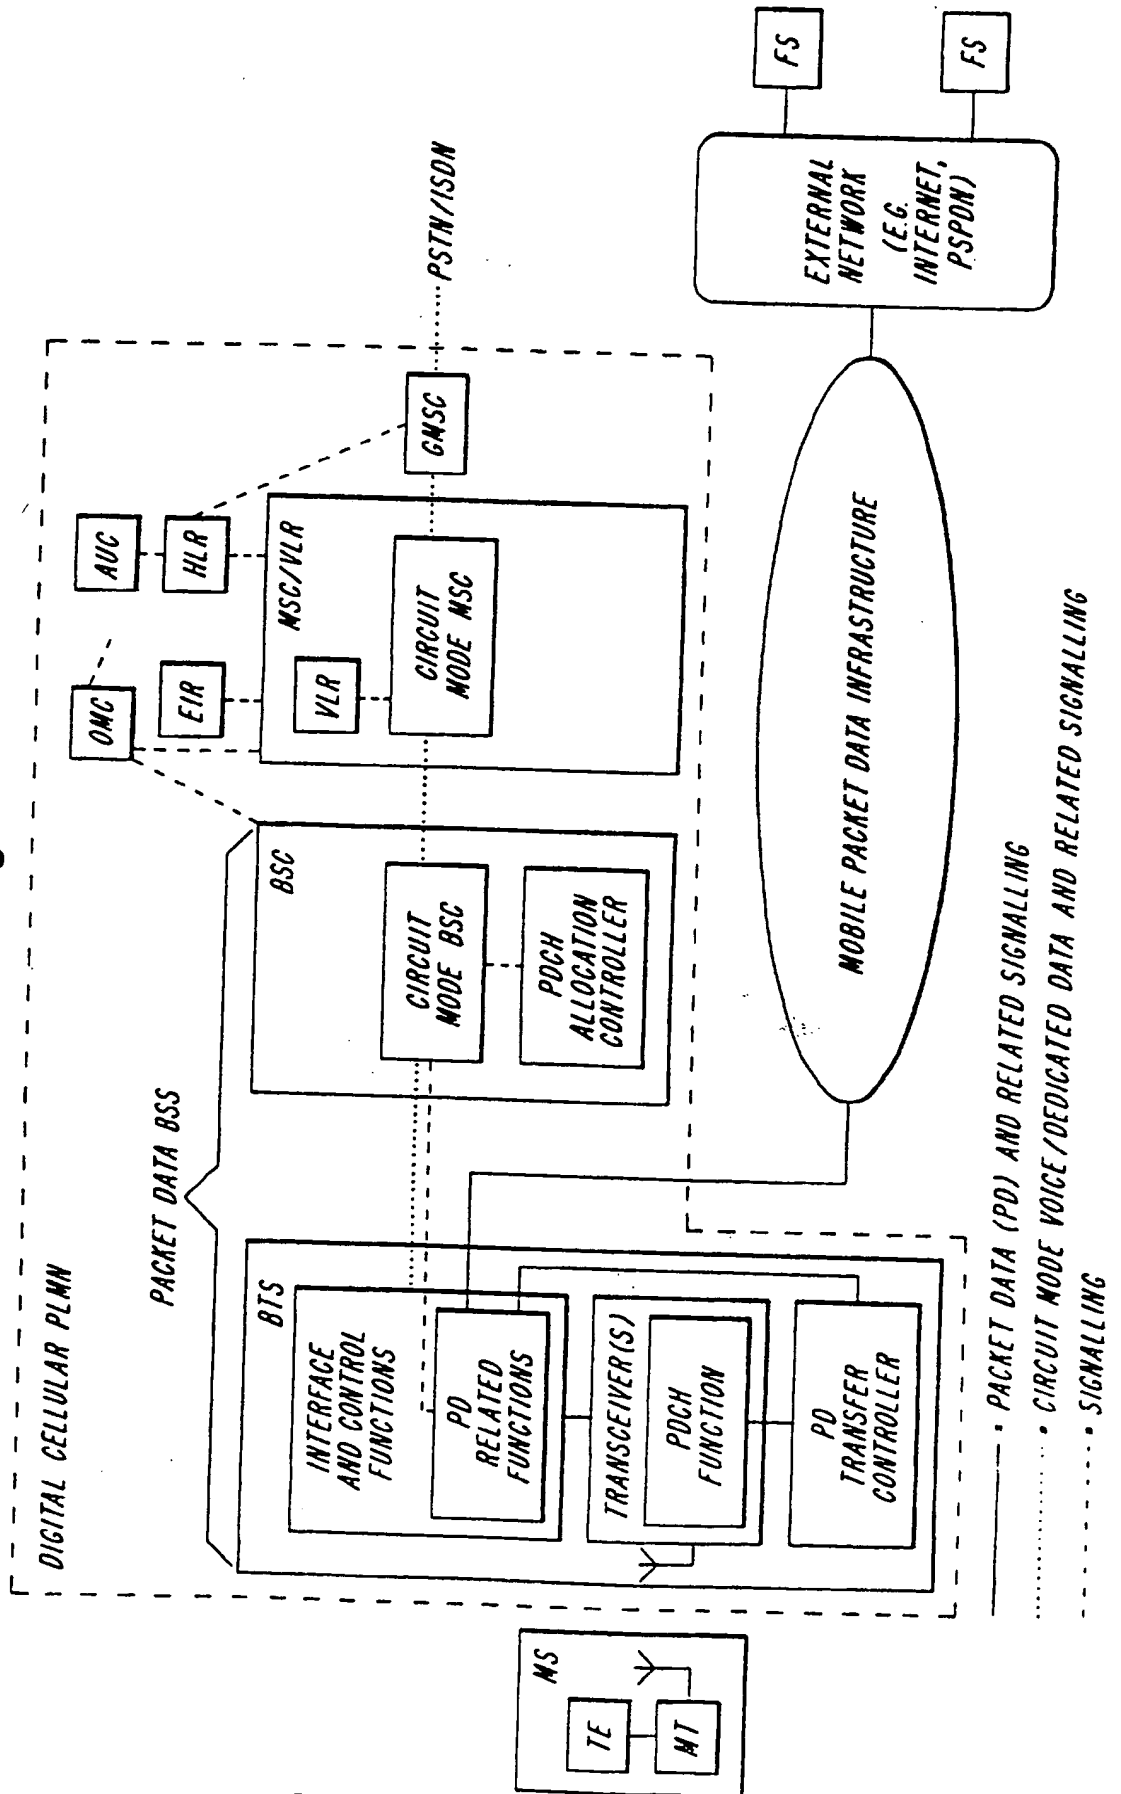

INTERNATIONAL SEARCH REPORT

International Application No

PCT/SE 96/00467

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H04Q7/38 H04Q7/24 H04L1/18

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04Q H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y A	WO,A,94 21090 (TELEFONAKTIEBOLAGET L M ERICSSON) 15 September 1994 see page 3, line 10 - line 14 see page 4, line 13 - page 6, line 5 see page 10, line 5 - page 18, line 1 ---	1,11 2,5,8, 10,13
Y	NTT REVIEW, JAN. 1992, JAPAN, vol. 4, no. 1, ISSN 0915-2334, pages 47-54, XP000292913 ONOE S ET AL: "Radio link control techniques for digital cellular systems" see page 50, left-hand column, paragraph 4 - page 51, left-hand column, paragraph 1; figure 5 --- -/--	1,11

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

& document member of the same patent family

Date of the actual completion of the international search

21 August 1996

Date of mailing of the international search report

- 3. 09. 96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+ 31-70) 340-3016

Authorized officer

Gries, T

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/SE 96/00467

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A-9421090	15-09-94	SE-C- 501009	17-10-94
		AU-B- 6223294	26-09-94
		CN-A- 1103541	07-06-95
		EP-A- 0647384	12-04-95
		FI-A- 945185	03-11-94
		JP-T- 7506710	20-07-95
		SE-A- 9300721	05-09-94
		US-A- 5467381	14-11-95
EP-A-577959	12-01-94	GB-A- 2268359	05-01-94
		EP-A- 0577960	12-01-94
		GB-A,B 2268360	05-01-94
		JP-A- 6077989	18-03-94
		JP-A- 6098370	08-04-94
		NO-A- 932303	27-12-93
		NO-A- 932304	27-12-93
		US-A- 5359603	25-10-94
EP-A-616480	21-09-94	GB-A- 2276292	21-09-94
		FI-A- 941240	18-09-94
		JP-A- 7007491	10-01-95
		NO-A- 940929	19-09-94
		US-A- 5406550	11-04-95
WO-A-9316547	19-08-93	SE-B- 469865	27-09-93
		AU-B- 3578393	03-09-93
		CA-A- 2129545	18-08-93
		CN-A- 1078587	17-11-93
		EP-A- 0627149	07-12-94
		FI-A- 943769	16-08-94
		JP-T- 7503825	20-04-95
		NO-A- 943029	31-08-94
		SE-A- 9200467	18-08-93
EP-A-544464	02-06-93	US-A- 5289179	22-02-94
		CA-A- 2078199	28-05-93
		FI-A- 925382	28-05-93
		JP-B- 2509059	19-06-96
		JP-A- 6070360	11-03-94

Information on patent family members

PCT/SE 96/00467

Form PCT/ISA 210 (patent family annex) (July 1992)